

High-Tech Commercial Pool Disinfection with Powerful Performance

The CCH® Elite feeder is a high capacity erosion (HCE) feeder that is compact and lightweight with a modular design. The feeder uses CCH® 1" calcium hypochlorite tablets that work in conjunction to produce a fresh concentrated liquid chlorine solution for clean and sanitized water. This innovative feeder system is easy to maintain and service with a flexible design that allows for easy integration for small to large commercial pools.

Switch to the CCH® Elite Feeder System, delivering clear and sparkling water time and time again!

Powerful Feeder Performance **Tablet Efficiencies** Provides consistent chlorine delivery Won't overstabilize pool Feeder designed to minimize More concentrated than liquid bleach maintenance requirements 2 in 1 dust reduction funnel for loading Dry, easy to handle formulation tablets with capacity extension Rotomolded components hold up to Will not cause reduction of ORP the strongest elements Highly concentrated to reduce Feeder design allows for easy access to internal components shipping and handling costs Longer shelf life when compared to Features high capacity erosion technology with the benefits of a liquid bleach venturi and booster pump A 3-in-1 product that chlorinates consistently, increases calcium to protect plaster and balances alkalinity to stabilize pH!






| Feeder Specifications | | |
|------------------------|----------------------|-------------------------------|
| Width | 25.3" | 642.62mm |
| Depth | 29.8" | 756.92mm |
| Height | 40.9" | 1038.89mm |
| Water Inlet Size | 1/2" MNPT | 12.7mm MNPT |
| Solution Outlet Size | 1/2" MNPT | 12.7mm MNPT |
| Operating Weight | 220lbs | 99.7kg |
| Shipping Weight | 60lbs | 27.7kg |
| Dry Chemical Capacity | 90 - 135lbs* | 40.82 – 61.23kg* |
| Feed Rate Range – Pool | 5 – 127 lbs AvCL/day | 2.3 – 57.6 kg AvCL/day |
| Feed Rate Range – Spa | 5 – 135 lbs AvCL/day | 2.3 – 61.2 kg AvCL/day |
| Electrical | 115VAC | |
| Operating Temperature | 40° – 120° F | 4.4° – 35°C |
| | | |

| *Higher capacity with inverted | bucket placed into ten funnel |
|--------------------------------|-------------------------------|
| riighei capacity with inverteu | bucket placed into top runner |

| Tablet Specifications | | |
|-----------------------|-------|----------------------|
| Active Ingredient | | Calcium Hypochlorite |
| Available Chlorine | | 68% |
| Weight | | 40g |
| Chemical Form | | Tablet |
| Diameter | 1" | 25.4mm |
| Color | | White |
| Container | | Pail |
| Container Weight | 45lbs | 20.4kg |

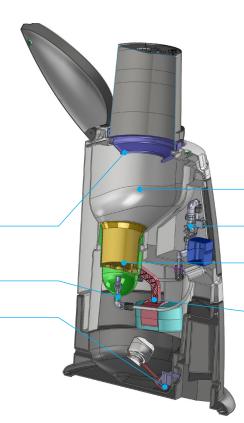

Hopper

Dual solenoids minimize solid build up

Tablet grid

Removable for easy maintenance

Emergency shut-off valve to prevent spills

High capacity erosion nozzle

Enhanced hopper attachment
allows for added chemical capacity and reduction in dust during chemical loading

Durable discharge valve