

Simplified Chemical Feed

For industrial and commercial water treatment applications



FLEXFLO®

Peristaltic Metering Pumps

A3

A4

How do FLEXFLO® pumps simplify chemical feed?



Accurately engineered rollers
CNC precision machined squeeze rollers for optimum squeeze, unparalleled accuracy, and longer tube life.

Brushless DC motor
BLDC motor reduces energy costs and is more durable compared to AC motors.

Touchscreen display
Large UV and chemical resistant 5" display with intuitive icon-based touchscreen controls, works with or without gloves.

Built-in leak detection
Patented Tube Failure Detection (TFD) senses tube rupture by detecting chemical in the pump head. No false triggering. Comes standard with every FLEXFLO® pump.

Minimal maintenance
No tools are required to open the pump head. The only wear part, the tube, can easily be replaced. The integrated 'life cycle counter' can accurately determine maintenance intervals.

Tubing options
Three available tube materials for chemical compatibility: Flex-A-Prene®, Flex-A-Thane®, and Flex-A-Chem®.

Simplified I/O connections



IP rated M12 connection ports
Protect against dust, moisture, and changes in temperature.

Ethernet and PROFIBUS ports
Industrial protocols allow for enhanced supervision and automation.

USBC connection port
Download the latest firmware in the field.



FLEXFLO® A3

Specially designed to meet application requirements of medium to large output volumes in water and wastewater where precise chemical metering is necessary. A3 remote control signal options include Pulse, 4-20mA, Modbus TCP, EtherNet IP, and PROFIBUS for enhanced supervision and automation for critical metering and transfer applications.

Technical Overview

GPH	.001 - 33.3	Enclosure Rating	NEMA 4X (IP66)
LPH	.003 - 126	Standards	cETLus, CE
PSI	125	Power Supply	100 to 240VAC-50.60 Hz
Bar	8.6	Warranty	2 years



FLEXFLO® A4

When your water treatment application calls for higher volume chemical feed output combined with the latest engineering functions, choose the FLEXFLO® A4. Remote control signal options include Pulse, 4-20mA, Modbus TCP, EtherNet IP, and PROFIBUS for enhanced supervision and automation for critical metering and transfer applications.

Technical Overview


GPH	.01 - 158.5	Enclosure Rating	NEMA 4X (IP66)
LPH	.04 - 600	Standards	cETLus, CE
PSI	125	Power Supply	100 to 240VAC-50.60 Hz
Bar	8.6	Warranty	2 years

Tube materials and fittings

Flex-A-Prene® tubes are uniquely engineered and designed for optimum performance and pressure capability. It is an excellent material for most water treatment applications. Chemically resistant to 25% Sodium Hypochlorite, 50% Sulfuric Acid, 30% Fluosilicic Acid, Ferric Chloride, Alum, and many others.

Flex-A-Chem® tubes consists of an outer Norprene jacket with an inner liner that is virtually unaffected by acids, bases, salts, ketons and alcohol.

Flex-A-Thane® this polyurethane material can be used with a variety of chemicals including oil and water based polymers. Sodium Hypochlorite, Alum, Ferric Chloride, fuels, lubricants, and many others.

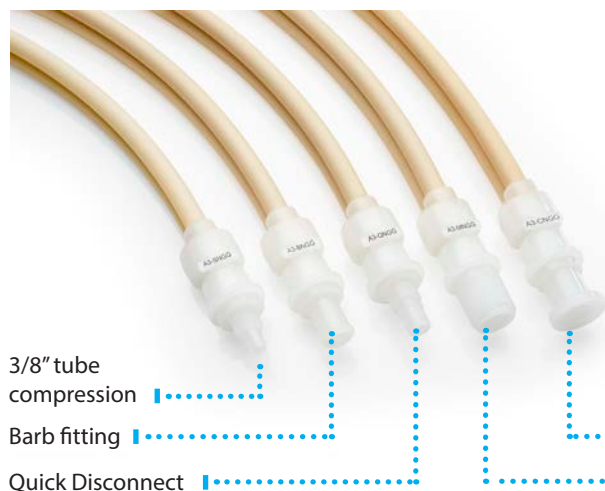

3/8" tube
compression

Barb fitting

Quick Disconnect

Tri-Clamp

1/2" M/NPT

Premium accessories to complete your system

Quick Disconnect Fittings

Safely and quickly disconnect your pump with Blue-White's Quick Disconnect Fittings. The red discharge fitting has an automatic check valve, preventing chemical backflow. The white suction fitting functions as a check valve when tubing is detached, preventing loss of prime and spills during routine maintenance.

- KIT-QSV 1/4" ID Tube Compression Fitting FKM o-rings
- KIT-QSE 1/4" ID Tube Compression Fitting EP o-rings
- KIT-QMV 1/2" M/NPT Fitting FKM o-rings
- KIT-QME 1/2" M/NPT Fitting EP o-rings
- KIT-QBV 1/2" Barb Fitting FKM o-rings
- KIT-QBE 1/2" Barb Fitting EP o-rings



Wall Mount Kit

Mount your pump at a convenient height to improve ergonomics. The wall mount kit comes with a tough, chemical resistant high-density polyethylene bracket and four concrete wall anchors.

- KIT-PSM



M12 Connection Cables

Compatible with Blue-White's FLEXFLO® A3 and A4, our M12 connection cables offer fast and easy connections even in challenging conditions.

- KIT-M12 M12 Cable Assembly, 10 ft, Qty 2
- KIT-M12-2-15 M12 Cable Assembly, 15 ft, Qty 2
- KIT-M12-2-30 M12 Cable Assembly, 30 ft, Qty 2
- KIT-M12-3 M12 Cable Assembly, 10 ft, Qty 3
- KIT-M12-3-15 M12 Cable Assembly, 15 ft, Qty 3
- KIT-M12-3-30 M12 Cable Assembly, 30 ft, Qty 3



M12 Network Bus Connection Cable

Compatible with Blue-White's FLEXFLO® A3 and A4, our M12 network bus connection cables offer fast and easy connections for process automation.

- KIT-DP3

