


INDUSTRIAL Skid Systems

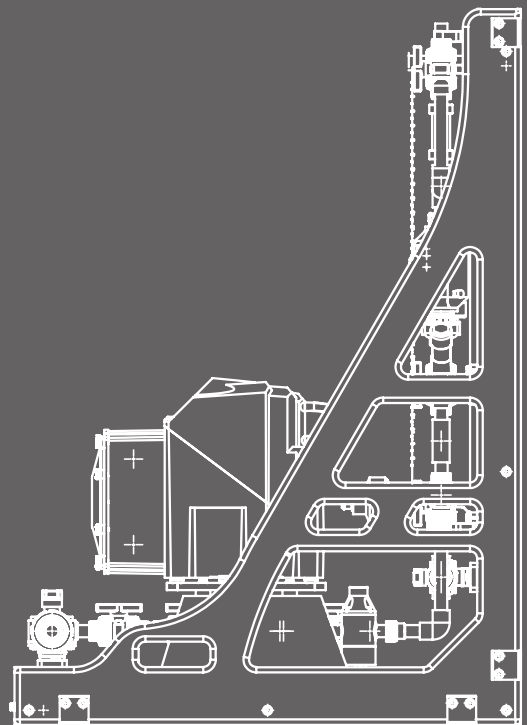

Blue-White[®]

CFPS-1

CHEM-FEED® Plastic Simplex Skid System

- > Chemically resistant polyethylene structure
- > Leak free, threadless connections
- > Pressure Relief Valve protects the system from over-pressurization
- > Check Valve protects the user from back-flow during pump maintenance
- > Flow Indicator provides a visual indication of chemical movement



Highlights

Piping

PVC Schedule 80
(optional CPVC, PVDF,
and Chem Proline®)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

A1, A2, A3, A4,
C2, C3, CD1, CD3

Drip tray

2.22 Gal
(8.4 L)

Frame material

Polyethylene

Mounting position

Floor or wall

Skid weight


80 lb.
(36 Kg)

Warranty

2 Years

Dimensions

Dim	Inch	cm	Dim	Inch	cm
A	30.00"	76.20	E	49.50"	125.73
B	34.00"	86.36	F	32.15"	81.65
C	45.37"	115.24	G	35.00"	88.90
D	46.47"	118.04			

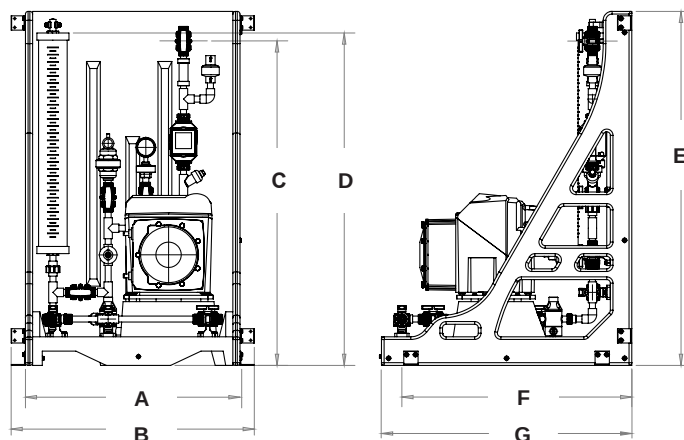

What's in the box

Pressure Relief Valve	(Optional if ordered)
Check Valve	-Calibration Cylinder
Flow Indicator x1	-Pulsation Dampener
Inlet Y Strainer x1	-Pressure Gauge with Guard
Inlet/outlet connection tubing	-Pressure Switch
Wall/floor mount brackets	-Back Pressure Valve
USB Drive (Operating manual)	-MS6 Chemical Flow meter
	-Terminal Box
	-Electrical Outlet Box



Model Number Matrix

*Consult factory for pricing

CHEM-FEED® Simplex Skid System Matrix - Industrial

CFPS-1		Single pump system - PE structure																	
Inlet/Outlet																			
A	Single Inlet / Single Outlet																		
X	None, Skid Panel Only																		
Piping/Unions																			
A	PVC				B	CPVC				C	PVDF				D	Chem Proline®			
Seals																			
V	FKM				E	EPDM													
Tubing Connections (Verify tubing connection matches pump outlet when ordering)																			
A	1/2" ID PVC Braided				B	1/2" ID PTFE				C	1/4" ID PE				D	1/4" ID PTFE			
Calibration Column																			
A	128 GPH (4000 mL) PVC								F	3 GPH (100 mL) PVC									
B	64 GPH (2000 mL) PVC								P	32 GPH (1000 mL) Glass									
C	32 GPH (1000 mL) PVC								Q	16 GPH (500 mL) Glass									
D	16 GPH (500 mL) PVC								R	6 GPH (200 mL) Glass									
E	8 GPH (250 mL) PVC								S	3 GPH (100 mL) Glass									
Pulsation Dampener																			
P	10 cubic in				X	Not Included													
Back Pressure Valve																			
B	Included				X	Not Included													
Pressure Gauge w/Guard																			
A	300 PSI				B	160 PSI				C	60 PSI								
Pressure Switch w/Guard																			
S	Included				X	Not Included													
Flow Meter w/Strainer																			
A	10-5000 mL/m				B	100-10000 mL/m													
X	Not Included																		
Terminal Box																			
TA	A3S/A4S/CD3S								TD	A3/A4/CD3(Legacy)									
TB	A1/CD1								X	Not Included									
TC	A2/C2/C3																		
Pumps																			
P	Mounted				X	Not Included													
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing "M = 1/2"MNPT " or "F = 1/2"FNPT" connections.																			
CFPS-1	I	A	A	V	A	-	A	P	B	A	S	A	TA	P	Sample Model Number				

NOTE: When ordering pumps for skids, pump head orientation is standard LEFT facing only. All skids are pressure tested prior to shipment. Pumps are purchased and shipped separately. Contact factory for quote/pricing on 5-point performance testing. **Customer is responsible for ensuring skid components are compatible with any chemicals being used.**

CFPS-2

CHEM-FEED® Plastic Duplex Skid System

- > Chemically resistant polyethylene structure
- > Leak free, threadless connections
- > Pressure Relief Valve protects the system from over-pressurization
- > Check Valve protects the user from back-flow during pump maintenance
- > Flow Indicator provides a visual indication of chemical movement



Highlights

Piping

PVC Schedule 80
(optional CPVC, PVDF,
and Chem Proline®)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

A1, A2, A3, A4,
C2, C3, CD1, CD3

Drip tray

2.3 Gal
(11.4 L)

Frame material

Polyethylene

Mounting position

Floor or wall

Skid weight



120 lb.
(54 Kg)

Warranty

2 Years

Dimensions

Dim	Inch	cm	Dim	Inch	cm
A	46.50"	118.11	E	49.50"	125.73
B	50.50"	128.27	F	32.40"	82.30
C	46.47"	118.04	G	35.00"	88.90
D	45.37"	115.24			

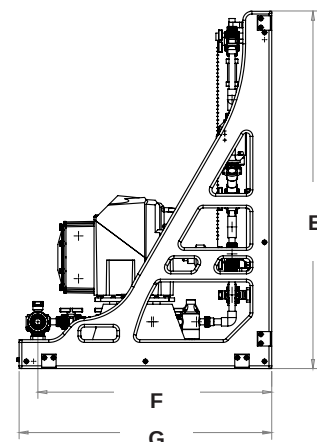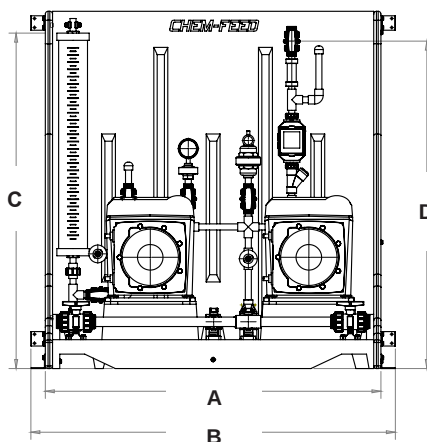

What's in the box

Pressure Relief Valve
Check Valve x2
Flow Indicator x1
Inlet Y Strainer x1
Inlet/outlet connection tubing
Wall/floor mount brackets
USB Drive (Operating manual)

(Optional if ordered)
Calibration Cylinder
-Pulsation Dampener
-Pressure Gauge with Guard
-Pressure Switch
-Back Pressure Valve
-MS6 Chemical Flow meter
-Terminal Box
-Electrical Outlet Box



Model Number Matrix

*Consult factory for pricing

CHEM-FEED® Duplex Skid System Matrix - Industrial

CFPS-2		Dual pump system - PE structure															
Inlet/Outlet																	
A	Single Inlet / Single Outlet																
B	Single Inlet / Dual Outlet																
X	None, Skid Panel Only																
Piping/Unions																	
A	PVC	B	CPVC	C	PVDF	D	Chem Proline®										
Seals																	
V	FKM	E	EPDM														
Tubing Connections (Verify tubing connection matches pump outlet when ordering)																	
A	1/2" ID PVC Braided	B	1/2" ID PTFE	C	1/4" ID PE	D	1/4" ID PTFE										
Calibration Column																	
A	128 GPH (4000 mL) PVC					F	3 GPH (100 mL) PVC										
B	64 GPH (2000 mL) PVC					P	32 GPH (1000 mL) Glass										
C	32 GPH (1000 mL) PVC					Q	16 GPH (500 mL) Glass										
D	16 GPH (500 mL) PVC					R	6 GPH (200 mL) Glass										
E	8 GPH (250 mL) PVC					S	3 GPH (100 mL) Glass										
Pulsation Dampener (One dampener provided. Contact factory for second dampener.)																	
P	10 cubic in					X	Not Included										
Back Pressure Valve																	
B	Included					X	Not Included										
Pressure Gauge w/Guard																	
A	300 PSI					B	160 PSI					C	60 PSI				
Pressure Switch w/Guard																	
S	Included					X	Not Included										
Flow Meter w/Strainer																	
A	10-5000 mL/m					B	100-10000 mL/m										
X	Not Included																
Terminal Box																	
TA	A3S/A4S/CD3S					TD	A3/A4/CD3 (Legacy)										
TB	A1/CD1					X	Not Included										
TC	A2/C2/C3																
Pumps																	
P	Mounted*					X	Not Included										
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing "M = 1/2"MNPT " or "F = 1/2"FNPT" connections.																	
CFPS-2	I	A	A	V	A	-	A	P	B	A	S	A	TA	P	Sample Model Number		

NOTE: When ordering pumps for skids, pump head orientation is standard LEFT facing only. *When ordering skid with pumps of different model numbers, please include complete model number of each pump and location on skid with order. Contact factory for quote/pricing on 5-point performance testing. Customer is responsible for ensuring skid components are compatible with any chemicals being used.

CFPS-3

CHEM-FEED® Plastic Triplex Skid System

- > Chemically resistant polyethylene structure
- > Leak free, threadless connections
- > Pressure Relief Valve protects the system from over-pressurization
- > Check Valve protects the user from back-flow during pump maintenance
- > Flow Indicator provides a visual indication of chemical movement



Highlights

Piping

PVC Schedule 80
(optional CPVC, PVDF,
and Chem Proline®)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

A1, A2, A3, A4,
C2, C3, CD1, CD3

Drip tray

2.74 Gal
(12.46 L)

Frame material

Polyethylene

Mounting position

Floor Only

Skid weight

200 lb.
(91 Kg)



Warranty

2 Years

Dimensions

Dim	Inch	cm
A	72.00"	182.88
B	76.00"	193.04
C	44.85"	113.92
D	48.57"	123.37

Dim	Inch	cm
E	49.50"	125.73
F	32.91"	83.59
G	35.00"	88.90

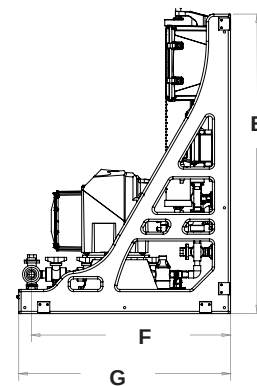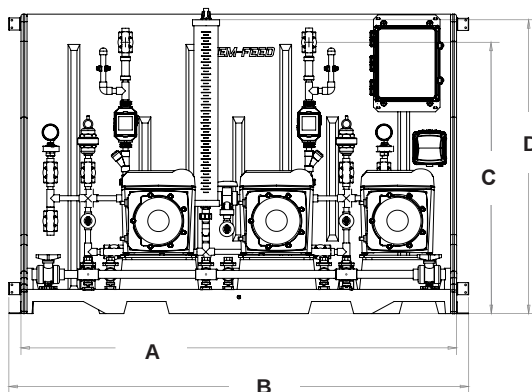

What's in the box

Pressure Relief Valve x2
Check Valve x2
Flow Indicator x2
Inlet Y Strainer x3
Inlet/outlet connection tubing
Wall/floor mount brackets
USB Drive (Operating manual)

(Optional if ordered)
Calibration Cylinder
-Pulsation Dampener
-Pressure Gauge with Guard
-Pressure Switch
-Back Pressure Valve
-MS6 Chemical Flow meter
-Terminal Box
-Electrical Outlet Box



Model Number Matrix

CHEM-FEED® Triplex Skid System Matrix - Industrial

CFPS-3														Triplex pump system - PE structure																																																																																																																																																																																																																	
Inlet/Outlet																																																																																																																																																																																																																															
A		Single Inlet / Dual Outlet																																																																																																																																																																																																																													
B		Single Inlet / Triple Outlet																																																																																																																																																																																																																													
X		None, Skid Panel Only																																																																																																																																																																																																																													
Piping/Unions																																																																																																																																																																																																																															
A				PVC				B				CPVC				C				PVDF				D				Chem Proline®																																																																																																																																																																																																			
Seals																																																																																																																																																																																																																															
V				FKM				E				EPDM																																																																																																																																																																																																																			
Tubing Connections (Verify tubing connection matches pump outlet when ordering)																																																																																																																																																																																																																															
A		1/2" ID PVC Braided				B		1/2" ID PTFE				C		1/4" ID PE				D		1/4" ID PTFE																																																																																																																																																																																																											
Calibration Column																																																																																																																																																																																																																															
A		128 GPH (4000 mL) PVC										F		3 GPH (100 mL) PVC																																																																																																																																																																																																																	
B		64 GPH (2000 mL) PVC										P		32 GPH (1000 mL) Glass																																																																																																																																																																																																																	
C		32 GPH (1000 mL) PVC										Q		16 GPH (500 mL) Glass																																																																																																																																																																																																																	
D		16 GPH (500 mL) PVC										R		6 GPH (200 mL) Glass																																																																																																																																																																																																																	
E		8 GPH (250 mL) PVC										S		3 GPH (100 mL) Glass																																																																																																																																																																																																																	
Pulsation Dampener (Two dampeners provided)																																																																																																																																																																																																																															
P		10 cubic in				X		Not Included																																																																																																																																																																																																																							
Back Pressure Valve																																																																																																																																																																																																																															
B		Included				X		Not Included																																																																																																																																																																																																																							
Pressure Gauge w/Guard																																																																																																																																																																																																																															
A		300 PSI				B		160 PSI				C		60 PSI																																																																																																																																																																																																																	
Pressure Switch w/Guard																																																																																																																																																																																																																															
S		Included				X		Not Included																																																																																																																																																																																																																							
Flow Meter w/Strainer																																																																																																																																																																																																																															
A		10-5000 mL/m				B		100-10000 mL/m																																																																																																																																																																																																																							
X		Not Included																																																																																																																																																																																																																													
Terminal Box																																																																																																																																																																																																																															
TA		A3S/A4S/CD3S				TD		A3/A4/CD3 (Legacy)																																																																																																																																																																																																																							
TB		A1/CD1				X		Not Included																																																																																																																																																																																																																							
TC		A2/C2/C3																																																																																																																																																																																																																													
Pumps																																																																																																																																																																																																																															
P		Mounted*				X		Not Included																																																																																																																																																																																																																							
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing "M = 1/2"MNPT " or "F = 1/2"FNPT" connections.																																																																																																																																																																																																																															
CFPS-3														I														A														A														V														A														-														A														P														B														A														S														A														TA														P														Sample Model Number													

NOTE: When ordering pumps for skids, pump head orientation is standard LEFT facing only. When ordering skid with pumps of different model numbers, please include complete model number of each pump and location on skid with order. Contact factory for quote/pricing on 5-point performance testing. **Customer is responsible for ensuring skid components are compatible with any chemicals being used.**

CFWS-1

CHEM-FEED® Wall Mount Simplex Skid System

- > Chemically resistant polyethylene structure
- > Leak free, threadless connections
- > Pressure Relief Valve protects the system from over-pressurization
- > Check Valve protects the user from back-flow during pump maintenance
- > Flow Indicator provides a visual indication of chemical movement



Highlights

Piping

PVC Schedule 80
(optional CPVC, PVDF,
and Chem Proline®)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

A1, A2, A3, A4,
C2, C3, CD1, CD3

Pump Shelf

Polyethylene

Frame material

Polyethylene

Mounting position

Wall

Skid weight



45 lb.
(20 Kg)

Warranty

2 Years

Dimensions

Dim	Inch	cm	Dim	Inch	cm
A	14.75"	37.5	D	46.63"	118.4
B	30.00"	76.2	E	17.29"	43.9
C	48.00"	121.9			

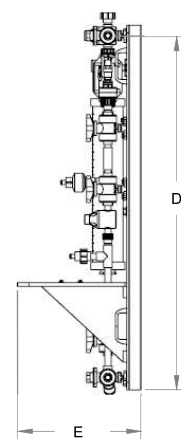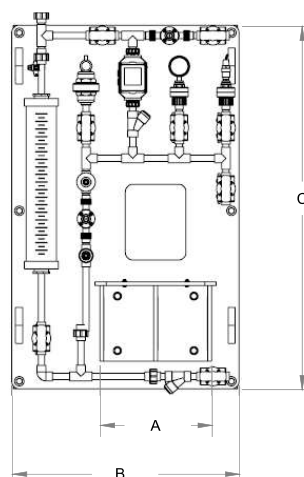

What's in the box

Pressure Relief Valve
Check Valve
Inlet Y Strainer x1
Inlet/outlet connection tubing
Wall mount brackets
USB Drive (Operating manual)

(Optional if ordered)
-Calibration Cylinder
-Pulsation Dampener
-Pressure Gauge with Guard
-Pressure Switch
-Back Pressure Valve
-MS6 Chemical Flow meter
-Terminal Box
-Electrical Outlet Box



Model Number Matrix

*Consult factory for pricing

CHEM-FEED® Simplex Wall Skid System Matrix - Industrial

CFWS-1	Single pump system - single chemical / single outlet, PE structure													
Inlet/Outlet														
A	Single Inlet / Single Outlet													
X	None, Skid Panel Only													
Piping/Unions														
A	PVC			C	PVDF									
B	CPVC			D	CHEM PROLINE®									
Seals														
V	FKM			E	EPDM									
Tubing Connections (Verify tubing connection matches pump outlet when ordering)														
A	1/2" ID PVC Braided			C	1/4" ID PE									
B	1/2" ID PTFE			D	1/4" ID PTFE									
Calibration Column														
A	128 GPH (4000 mL) PVC			F	3 GPH (100 mL) PVC									
B	64 GPH (2000 mL) PVC			P	32 GPH (1000 mL) Glass									
C	32 GPH (1000 mL) PVC			Q	16 GPH (500 mL) Glass									
D	16 GPH (500 mL) PVC			R	6 GPH (200 mL) Glass									
E	8 GPH (250 mL) PVC			S	3 GPH (100 mL) Glass									
Pulsation Dampener														
P	10 cubic in			X	Not Included									
Back Pressure Valve														
B	Included			X	Not Included									
Pressure Gauge w/Guard														
A	300 PSI			B	160 PSI			C	60 PSI					
Pressure Switch w/Guard														
S	Included			X	Not Included									
Flow Meter w/Strainer														
A	10-5000 mL/min													
B	100-10000 mL/min													
X	Not Included													
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing “M = 1/2”MNPT ” or “F = 1/2”FNPT” connections.														
CFWS-1	I	A	A	V	A	A	P	B	A	S	A	X	X	Sample Model Number

NOTES: When ordering pumps for skids, pump head orientation is standard LEFT facing only. Terminal Boxes quoted and mounted separately. All skids are pressure tested prior to shipment. Pumps are purchased and shipped separately. Contact factory for quote/pricing on 5-point performance testing. Customer is responsible for ensuring skid components are compatible with any chemicals being used.

CFWS-2

CHEM-FEED® Wall Mount Duplex Skid System

- > Chemically resistant polyethylene structure
- > Leak free, threadless connections
- > Pressure Relief Valve protects the system from over-pressurization
- > Check Valve protects the user from back-flow during pump maintenance
- > Flow Indicator provides a visual indication of chemical movement



Highlights

Piping

PVC Schedule 80
(optional CPVC, PVDF,
and Chem Proline®)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

A1, A2, A3, A4,
C2, C3, CD1, CD3

Pump Shelf

Polyethylene

Frame material

Polyethylene

Mounting position

Wall

Skid weight

80 lb.
(36 Kg)


Warranty

2 Years

Dimensions

Dim	Inch	cm
A	14.75"	37.5
B	57.53"	146.1
C	60.00"	152.4
D	48.00"	121.9

Dim	Inch	cm
E	4.63"	117.0
F	14.38"	36.5
G	17.41"	44.2

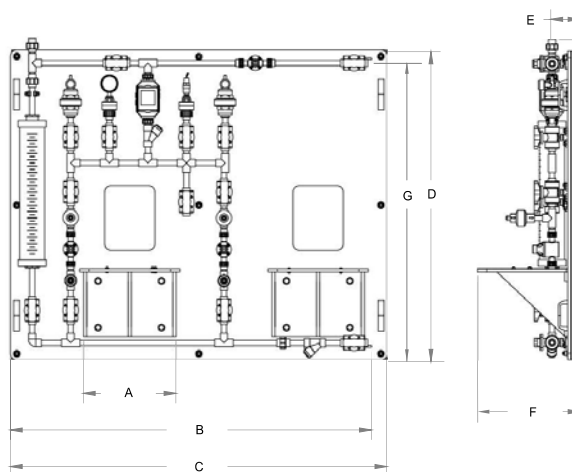

What's in the box

Pressure Relief Valve
Check Valve
Inlet Y Strainer x1
Inlet/outlet connection tubing
Wall mount brackets
USB Drive (Operating manual)

(Optional if ordered)
-Calibration Cylinder
-Pulsation Dampener
-Pressure Gauge with Guard
-Pressure Switch
-Back Pressure Valve
-MS6 Chemical Flow meter
-Terminal Box
-Electrical Outlet Box



Model Number Matrix

*Consult factory for pricing

CHEM-FEED® Duplex Wall Skid System Matrix - Industrial

CFWS-2		Duplex pump system - single chemical / single outlet, PE structure													
Inlet/Outlet															
A	Single Inlet / Single Outlet														
X	None, Skid Panel Only														
Piping/Unions															
A	PVC				C	PVDF									
B	CPVC				D	CHEM PROLINE®									
Seals															
V	FKM				E	EPDM									
Tubing Connections (Verify tubing connection matches pump outlet when ordering)															
A	1/2" ID PVC Braided				C	1/4" ID PE									
B	1/2" ID PTFE				D	1/4" ID PTFE									
Calibration Column															
A	128 GPH (4000 mL) PVC				F	3 GPH (100 mL) PVC									
B	64 GPH (2000 mL) PVC				P	32 GPH (1000 mL) Glass									
C	32 GPH (1000 mL) PVC				Q	16 GPH (500 mL) Glass									
D	16 GPH (500 mL) PVC				R	6 GPH (200 mL) Glass									
E	8 GPH (250 mL) PVC				S	3 GPH (100 mL) Glass									
Pulsation Dampener (10 cubic in.)															
P	Two Dampeners				D	One Dampener				X	Not Included				
Back Pressure Valve															
B	Included				X	Not Included									
Pressure Gauge w/Guard															
A	300 PSI				B	160 PSI				C	60 PSI				
Pressure Switch w/Guard															
S	Included				X	Not Included									
Flow Meter w/Strainer															
A	10-5000 mL/min														
B	100-10000 mL/min														
X	Not Included														
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing “M = 1/2”MNPT ” or “F = 1/2”FNPT” connections.															
CFWS-2	I	A	A	V	A	A	P	B	A	S	A	X	X	Sample Model Number	

NOTES: When ordering pumps for skids, pump head orientation is standard LEFT facing only. Terminal Boxes quoted and mounted separately. All skids are pressure tested prior to shipment. Pumps are purchased and shipped separately. Contact factory for quote/pricing on 5-point performance testing. Customer is responsible for ensuring skid components are compatible with any chemicals being used.

CFCS-1

CHEM-FEED® Compact Simplex Skid System

- > The pre-fabricated compact design allows for easy installation
- > Strong, lightweight polyethylene welded structure
- > Dual side inlets enable connection of multiple skids to the same inlet
- > Flow Indicator provides a visual indication of chemical movement
- > Integrated spill containment



Highlights

Piping

PVC Schedule 80
(optional CPVC)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

M1, M2, M3, M4,
C2, C3, MD1, MD3

Drip tray

1.8 Gallons
(7 L)

Frame material

Polyethylene

Mounting position

Floor or wall

Skid weight



60 lb.
(27.2 kg)

Warranty

2 Years

Dimensions

Dim	Inch	cm	Dim	Inch	cm	Dim	Inch	cm
A	5.75"	14.60	E	22.11"	56.16	I	5.42"	13.77
B	21.00"	53.34	F	24.00"	61.00	J	23.92"	60.76
C	24.88"	63.20	G	6.24"	15.85	K	37.53"	95.33
D	27.86"	70.76	H	14.24"	36.17	L	39.05"	99.20

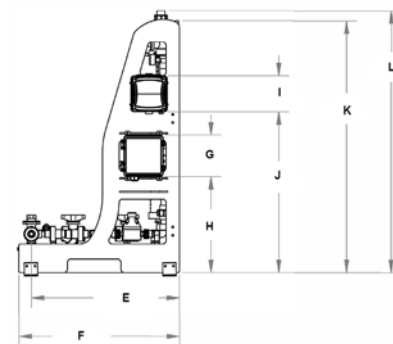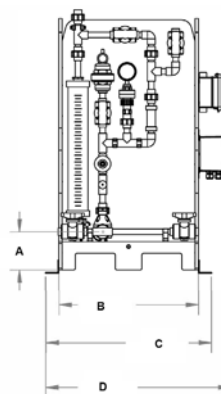

What's in the box

Standard

- Pressure Relief Valve
- Check Valve
- Flow Indicator
- Inlet Y Strainer
- Mounting Pads
- Calibration Column

Optional Components(See product matrix)

- Pulsation Dampener
- Pressure Gauge with Guard
- Terminal Box



Model Number Matrix

CFCS-1

CHEM-FEED® Compact Skid System Matrix - Simplex

CFCS-1	X	Single pump system - single chemical / single outlet - PE structure															
Inlet/Outlet																	
A		Single Inlet / Single Outlet															
X		None, Skid Panel Only															
Piping/Unions																	
A		PVC			B		CPVC										
Seals																	
V		FKM			E		EPDM										
Tubing Connections (Verify tubing connection matches pump outlet when ordering)																	
A		1/2" ID PVC Braided			B		1/2" ID PTFE			C		1/4" ID PE		D		1/4" ID PTFE	
Calibration Column																	
B		64 GPH (2000 mL) PVC						P		32 GPH (1000 mL) Glass							
C		32 GPH (1000 mL) PVC						Q		16 GPH (500 mL) Glass							
D		16 GPH (500 mL) PVC						R		6 GPH (200 mL) Glass							
E		8 GPH (250 mL) PVC						S		3 GPH (100 mL) Glass							
F		3 GPH (100 mL) PVC															
Pulsation Dampener																	
P		10 cubic in			X		Not Included										
		X		Not Used													
Pressure Gauge w/Guard																	
A		300 PSI			B		160 PSI			C		60 PSI					
		X		Not Used													
		X		Not Used													
Terminal Box																	
TA		S Series Pumps						TC		A2/M2/C2/C3							
TB		1 Series Pumps						X		Not Included							
Pumps																	
P		Mounted*			X		Not Included										
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing "M = 1/2"MNPT " or "F = 1/2"FNPT" connections.																	
CFCS-1	X	A	A	V	A	-	B	P	X	A	X	X	TA	P	Sample Model Number		

NOTE: When ordering pumps for skids, pump head orientation is standard LEFT facing only. All skids are pressure tested prior to shipment. Pumps are purchased and shipped separately. Contact factory for quote/pricing on 5-point performance testing.

Customer is responsible for ensuring skid components are compatible with any chemicals being used.

CFCS-2

CHEM-FEED® Compact Duplex Skid System

- > The pre-fabricated compact design allows for easy installation
- > Strong, lightweight polyethylene welded structure
- > Dual side inlets enable connection of multiple skids to the same inlet
- > Flow Indicator provides a visual indication of chemical movement
- > Integrated spill containment



Highlights

Piping

PVC Schedule 80
(optional CPVC)

Pressures up to

150 PSI
(10.3 bar)

Compatibility

M1, M2, M3, M4,
C2, C3, MD1, MD3

Drip tray

2.8 Gallons
(10.6L)

Frame material

Polyethylene

Mounting position

Floor or wall

Skid weight


100 lb.
(45.4 kg)

Warranty

2 Years

Dimensions

Dim	Inch	cm	Dim	Inch	cm	Dim	Inch	cm
A	5.75"	14.60	E	21.89"	55.60	I	5.42"	13.77
B	32.25"	92.10	F	24.00"	61.00	J	23.92"	60.76
C	40.13"	101.90	G	8.59"	21.80	K	37.53"	95.33
D	43.49"	110.05	H	12.10"	30.70	L	39.05"	99.20

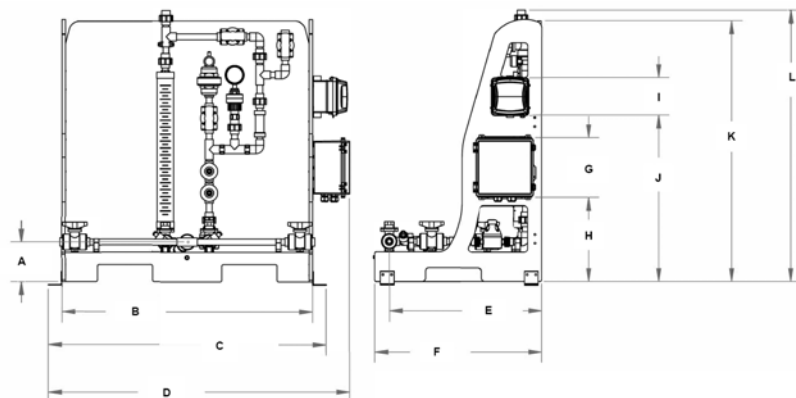

What's in the box

Standard

- Pressure Relief Valve
- Check Valve
- Flow Indicator
- Inlet Y Strainer
- Mounting Pads
- Calibration Column

Optional Components(See product matrix)

- Pulsation Dampener
- Pressure Gauge with Guard
- Terminal Box



Model Number Matrix

CFCS-2

CHEM-FEED® Compact Skid System Matrix - Duplex

CFCS-2	X	Dual pump system - single chemical / single outlet - PE structure														
Inlet/Outlet																
A	Single Inlet / Single Outlet															
X	None, Skid Panel Only															
Piping/Unions																
A	PVC	B	CPVC													
Seals																
V	FKM	E	EPDM													
Tubing Connections (Verify tubing connection matches pump outlet when ordering)																
A	1/2" ID PVC Braided	B	1/2" ID PTFE	C	1/4" ID PE	D	1/4" ID PTFE									
Calibration Column																
B	64 GPH (2000 mL) PVC				P	32 GPH (1000 mL) Glass										
C	32 GPH (1000 mL) PVC				Q	16 GPH (500 mL) Glass										
D	16 GPH (500 mL) PVC				R	6 GPH (200 mL) Glass										
E	8 GPH (250 mL) PVC				S	3 GPH (100 mL) Glass										
F	3 GPH (100 mL) PVC															
Pulsation Dampener																
P	10 cubic in				X	Not Included										
X	Not Used															
Pressure Gauge w/Guard																
A	300 PSI				B	160 PSI				C	60 PSI					
X	Not Used															
X	Not Used															
Terminal Box																
TA	S Series Pumps				TC	A2/M2/C2/C3										
TB	1 Series Pumps				X	Not Included										
Pumps																
P	Mounted*				X	Not Included										
*reference Adapter Kits Sheet 85000-198 when ordering with pumps utilizing "M = 1/2"MNPT" or "F = 1/2"FNPT" connections.																
CFCS-2	X	A	A	V	A	-	B	P	X	A	X	X	TA	P	Sample Model Number	

NOTE: When ordering pumps for Duplex CFCS-2 skids, pump head orientation is standard LEFT facing for the right side pump, and RIGHT facing for the left side pump. All skids are pressure tested prior to shipment. Pumps are purchased and shipped separately. Contact factory for quote/pricing on 5-point performance testing.

Customer is responsible for ensuring skid components are compatible with any chemicals being used.

PUMP to SKID - ADAPTER KITS

An adapter kit must be added to skid orders (single, duplex, triplex) with the following pumps:

A1, M1, A2, M2, A3, M3, A4, M4. (with “M” type tube fittings)

C2, C3. (with “F” type connections.)

(Kits are not necessary when ordering CD3 or MD3 pumps, or pumps with “S”, “B”, or “Q” tube fittings.)

Number of adapter kits ordered must equal number of pumps.

No extra charge for the Kits when ordered with skids.

A1/M1 Pumps with “M” type tube fittings



KIT-CSP Kit Coupling S/A .37T .50F/NPT PVC

KIT-CSC Kit Coupling S/A .37T .50F/NPT CPVC



KIT-CBP Kit Coupling S/A .50 Barb .50F/NPT PVC

KIT-CBC Kit Coupling S/A .50 Barb .50F/NPT CPVC

A2/M2, A3/M3, A4/M4 Pumps with “M” type tube fittings



KIT-USPV Kit Union S/A .37T .50F/NPT PVC/FKM

KIT-USPE Kit Union S/A .37T .50F/NPT PVC/EP

KIT-USCV Kit Union S/A .37T .50F/NPT CPVC/FKM

KIT-USCE Kit Union S/A .37T .50F/NPT CPVC/EP



KIT-UBPV Kit Union S/A .50 Barb .50F/NPT PVC/FKM

KIT-UBPE Kit Union S/A .50 Barb .50F/NPT PVC/EP

KIT-UBCV Kit Union S/A .50 Barb .50F/NPT CPVC/FKM

KIT-UBCE Kit Union S/A .50 Barb .50F/NPT CPVC/EP

C2/C3 Pumps with “F” type connections



KIT-EBP Kit Elbow S/A .50 Barb .50 M/NPT PVC

SKID ACCESSORIES

Part No.	Description
Calibration Columns	
CC-0100P	Calibration Cylinder, 100mL, PVC, 1/2" Socket
CC-0250P	Calibration Cylinder, 250mL, PVC, 1/2" Socket
CC-0500P	Calibration Cylinder, 500mL, PVC, 3/4" Socket
CC-1000P	Calibration Cylinder, 1000mL, PVC, 3/4" Socket
CC-2000P	Calibration Cylinder, 2000mL, PVC, 1" Socket
CC-4000P	Calibration Cylinder, 4000mL, PVC, 1" Socket
Pressure Gauges, Pressure Switches, and Gauge Guards	
90018-268	Pressure Gauge & Guard, PVC, 0-60 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-269	Pressure Gauge & Guard, PVC, 0-160 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-270	Pressure Gauge & Guard, PVC, 0-300 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-271	Pressure Gauge & Guard, CPVC, 0-60 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-272	Pressure Gauge & Guard, CPVC, 0-160 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-273	Pressure Gauge & Guard, CPVC, 0-300 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-283	Pressure Gauge & Guard, PVDF, 0-60 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-284	Pressure Gauge & Guard, PVDF, 0-160 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-285	Pressure Gauge & Guard, PVDF, 0-300 psi range, 2.5" dia. dial, 304/316SS, 1/2" Female NPT connection
90018-037	Pressure Switch, 10-100 psi range, 1/2" conduit connection, loose wires (60 in.), 316SS, 1/4" Male NPT connection
90018-103	Pressure Switch, 20-200 psi range, 1/2" conduit connection, loose wires (60 in.), 316SS, 1/4" Male NPT connection
90008-746	Gauge Guard, GGU050POTT, PTFE Diaphragm, PVC Body, 1/2" Female NPT x 1/4" Female NPT
90008-768	Gauge Guard, GGU050COTT, PTFE Diaphragm, PVC Body, 1/2" Female NPT x 1/4" Female NPT
90008-868	Gauge Guard, GGU050KOTT, PTFE Diaphragm, PVDF Body, 1/2" Female NPT x 1/4" Female NPT
Pressure Relief Valves	
90018-260	Pressure Relief Valve, True Union, 1/2" Socket, PVC Body, FKM Seals, PTFE Diaphragm
90018-261	Pressure Relief Valve, True Union, 1/2" Socket, PVC Body, EP Seals, PTFE Diaphragm
90018-262	Pressure Relief Valve, True Union, 1/2" Socket, CPVC Body, FKM Seals, PTFE Diaphragm
90018-263	Pressure Relief Valve, True Union, 1/2" Socket, CPVC Body, EP Seals, PTFE Diaphragm
90018-093	Pressure Relief Valve, True Union, 1/2" Socket, PVC Body, PTFE Seals, PTFE Diaphragm
90008-922	Pressure Relief Valve, True Union, 1" Socket, PVC Body, FKM Seals, PTFE Diaphragm
90018-264	Pressure Relief Valve, Unibody, 1/2" Socket, PVC Body, FKM Seals, PTFE Diaphragm
90018-265	Pressure Relief Valve, Unibody, 1/2" Socket, PVC Body, EP Seals, PTFE Diaphragm
90018-266	Pressure Relief Valve, Unibody, 1/2" Socket, CPVC Body, FKM Seals, PTFE Diaphragm
90018-267	Pressure Relief Valve, Unibody, 1/2" Socket, CPVC Body, EP Seals, PTFE Diaphragm
Back Pressure Valves	
90018-252	Back-Pressure Valve, True Union, 1/2" Socket, PVC Body, FKM Seals, PTFE Diaphragm
90018-253	Back-Pressure Valve, True Union, 1/2" Socket, PVC Body, EP Seals, PTFE Diaphragm
90018-254	Back-Pressure Valve, True Union, 1/2" Socket, CPVC Body, FKM Seals, PTFE Diaphragm
90018-255	Back-Pressure Valve, True Union, 1/2" Socket, CPVC Body, EP Seals, PTFE Diaphragm
90018-256	Back-Pressure Valve, Unibody, 1/2" Socket, PVC Body, FKM Seals, PTFE Diaphragm
90018-257	Back-Pressure Valve, Unibody, 1/2" Socket, PVC Body, EP Seals, PTFE Diaphragm
90018-258	Back-Pressure Valve, Unibody, 1/2" Socket, CPVC Body, FKM Seals, PTFE Diaphragm
90018-259	Back-Pressure Valve, Unibody, 1/2" Socket, CPVC Body, EP Seals, PTFE Diaphragm